

SLP-DL410

4 inch Direct Thermal
Desktop Label Printer



Logistics



Ticketing




Stadium
& Arenas



Healthcare

Ultra-Compact, Economic & Specialized

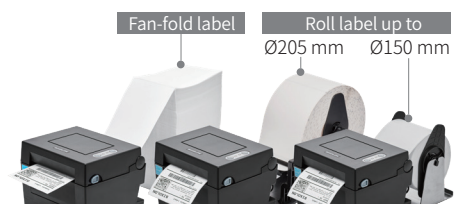

Fan-fold label

Roll label up to
Ø205 mm Ø150 mm

Small Foot Print and Versatile Features

- Compact and space-saving design
- Supporting a wide range of media types such as fan-fold or large labelling
- Various Options: external roll media, peeler and auto-cutter




The World's
Most Compact

5
IPS



Premium-Level Performance

- Fully compatible with market-leading programming Languages
- Smart switch programming languages without setting the mode
- Fast data processing and a printing speed up to 5 ips (127 mm/sec)
- Smart Media Detection™

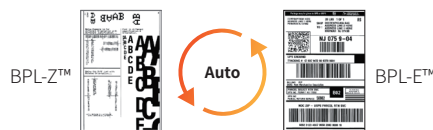

Mobile Device Compatibility

- The World's first - desktop label printer with built-in Bluetooth and MFi iAP2 certification
- Smart Bluetooth Auto Switch: switching from iOS mode to standard Bluetooth mode
- Compatible with smart mobile devices

BIXOLON[®]
a Better Solution for your Business™

SLP-DL410

4 inch Direct Thermal Desktop Label Printer

Specifications

Printer Specifications

Print Method

Direct Thermal

Print Speed

SLP-DL410: Up to 5 ips (127 mm/sec)

SLP-DL413: Up to 5 ips (127 mm/sec)

Print Resolution

SLP-DL410: 203 dpi

SLP-DL413: 300 dpi

Print Width

SLP-DL410: Up to 108 mm

SLP-DL413: Up to 105.7 mm

Print Length

Up to 2,000 mm

Sensor

Transmissive, Reflective (adjustable),
Head open

Media Characteristics

Media Type

Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width

25 ~ 116 mm

Media Roll Diameter

External roll media options up to
Ø 150 mm to 205 mm

Media Thickness

0.06 ~ 0.20 mm

Physical Characteristics

Dimensions (WxDxH)

177 x 150 x 148.5 mm
(6.97 x 5.91 x 5.85 inch)

Weight

1.6 kg (3.53 lbs.)

Electrical

EnergyStar Certified,
Internal Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory

64 MB SDRAM, 128 MB Flash

Interface

Standard: USB + WLAN*

Optional: ① USB + Ethernet + WLAN¹

② USB + Ethernet + WLAN¹ + Bluetooth²

③ USB + WLAN¹ + Bluetooth²

WLAN¹: 802.11a/b/g/n/ac USB dongle type
(Optional)

Bluetooth²: Built-in type, MFi iAP2 certified

Real Time Clock

Supported

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Software

Emulation

SLCS™, BPL-Z™ (ZPLII), BPL-E™ (EPL)

Driver / Utility

Windows Driver (Europlus / Seagull),
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program, OPOS / JPOS Driver,
Bartender Ultralite for BIXOLON, Label Artist-II™

SDK / Plugin

Android / iOS / Windows SDK, Linux SDK,
Chrome SDK, Xamarin SDK

Application

Label Artist™ Mobile (Android, iOS),
mPrint App (iOS), mPrint Server (Windows, iOS)

MDM

BIXOLON Profile Manager
- XPM™, XCM™ (Windows, Android)

Fonts / Graphics / Symbologies

Fonts

10 SLCS™ / One SLCS™ / 16 BPL-Z™ /
One BPL-Z™ / 5 BPL-E™ / 23 Code Page /
Unicode supported (UTF-8, UTF-16LE,
UTF-16BE)

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Codabar, Code 11, Code 39, Code 93,
Code 128, EAN-13, EAN-8, Industrial 2-of-5,
Interleaved 2-of-5, Logmars, MSI, Plessey,
Postnet, GS1 DataBar (RSS-14),
Standard 2-of-5, UPC/EAN extensions,
UPC-A, UPC-E, IMB

2D: Aztec, Codablock, Code 49, Data Matrix,
MaxiCode, MicroPDF417, PDF417, QR code,
TLC 39

Options

Peeler, Auto Cutter, External Paper Supply,
External Power Adaptor,
WLAN Dongle (Consensus required)

